


PRODUCT SPECIFICATIONS

X7 (Gen 2)


The X7 prints industrial-grade manufacturing jigs, jaws, tools, fixtures, and end-use parts. Designed from the ground up to survive the production floor environment and capable of printing parts stronger than machined aluminum for a fraction of the cost, the X7 delivers unparalleled surface finish, build size, and reliability. Accelerate part production with Turbo Print, our fastest print mode — only available on the X7.

Printer Properties	Process	Fused filament fabrication, Continuous Filament Fabrication
	Build Volume	330 x 270 x 200 mm (13 x 10.6 x 7.9 in)
	Weight	48 kg (106 lbs)
	Machine Footprint	584 x 483 x 914 mm (23 x 19 x 36 in)
	Print Bed	Kinematic coupling — flat to within 80 µm
	Laser	In-process inspection, active print calibration, bed leveling
	Extrusion System	Second-generation extruder, out-of-plastic and out-of-fiber detection
	Power	100–240 VAC, 150 W (2 A peak)
	RF Module	Operating Band 2.4 GHz Wi-Fi Standards 802.11 b/g/n
Materials	Plastics Available	Onyx, Onyx FR, Onyx ESD, Nylon White
	Fibers Available	Carbon fiber, fiberglass, Kevlar®, HST fiberglass
	Tensile Strength	800 MPa (25.8x ABS, 2.6x 6061-T6 Aluminum) *
	Tensile Modulus	60 GPa (26.9x ABS, 0.87x 6061-T6 Aluminum) *
Part Properties	Layer Height	100 µm default, 50 µm minimum, 250 µm maximum
	Infill	Closed cell infill: multiple geometries available
Software	Supplied Software	Eiger Cloud (Other options available at cost)
	Security	Two-factor authentication, org admin access, single sign-on

FRONT VIEW

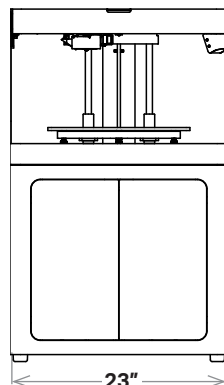

SIDE VIEW

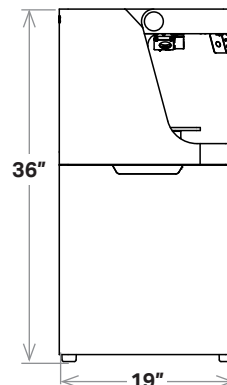

* Continuous carbon fiber data. **Note:** All specifications are approximate and subject to change without notice.